



## Five-zone Mixing Amplifier

PMS-5120CD (120W)  
PMS-5240CD (240W)



### Description

The **ARTONE** 5 zone mixer amplifier PMS-5120CD & PMS-5240CD series is a reliable 100V commercial mixer amplifier for public address, background music and warning system. It has integrated special made player, which included CD, Mp3, FM tuner and Bluetooth player. This allows the speakers have more option when select the music for floor or room.


Besides the 5 zone selector feature, the chime tone and EVAC warning sound makes PMS-5120CD & PMS-5240CD more useful for the announcement before speaking, and necessary for any emergency matters.

There are 3 wired microphones available to be connected with PMS-5120CD and PMS-5240CD, and echo effect is adjustable, the MIC1 has priority selector for paging.



### Features

- Built-in audio sources, Mp3, FM tuner and Bluetooth;
- 5 zones selector;
- RCA AUX input x 2, AUX1 and AUX2 volume control knob;
- Video output from DVD player;
- 3 microphone inputs with echo effect and MIC1 priority selectable;
- Chime tone and EVAC warning sound integrated;
- Treble, bass, master volume control;
- Remote controller;
- Speaker output 4-16, 70V, 100V line;
- Shortcircuit, limiter, high temperature protection.

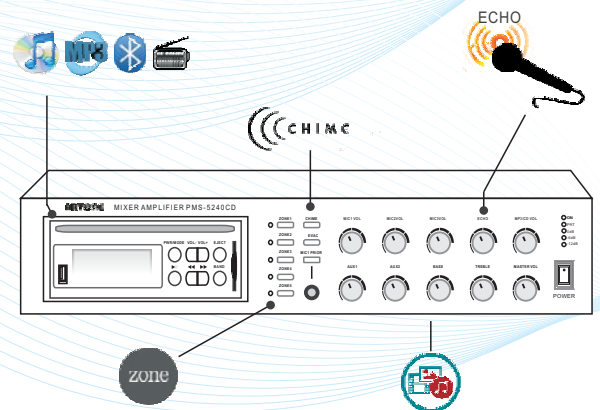

### Specification

Model No.	PMS-5120CD	PMS-5240CD
Power	120W	240W
Speaker Outputs	4-16Ω, 70V, 100V	
Input Sensitivity	Mic: 5mV/600Ω unbalanced 6.3mm phone jack input   AUX: 350mV/10KΩ RCA input	
Output Sensitivity & Impedance	1000mV/470Ω, Unbalanced RCA output	
Frequency Response	30-20KHz	
S/N Ratio	Mic: 66 dB   AUX: 80 dB	
THD	< 1% at 1KHz, 1/3 rated power	
Audio Source	DVD, Mp3 (USB/SD), Tuner, Bluetooth, AUX input x 2	
Protection	High temperature, overload & short circuit	
Power Supply	220V~240V 50/60Hz or 110V	
Material & Finish	Aluminium front panel, metal case	
Dimension	485 x 320 x 88 mm	
Weight	13.8 kg	19.5 kg